




## NC 型兩節式經濟型

## 萬向接頭系列


## NC-※※-00A

附屬品：強力銷 1 支、扣環 2 個  
追加加工不可

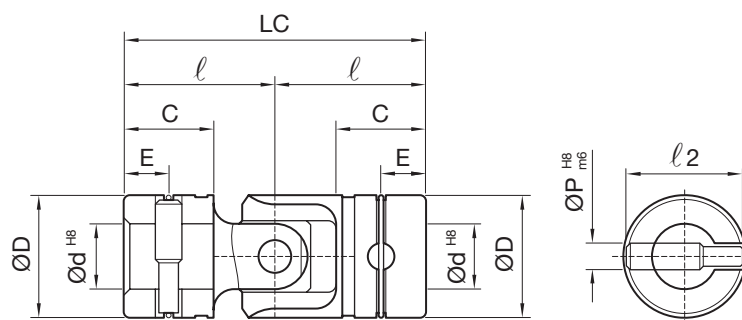


## NC-※※-01A

附屬品：強力銷 1 支、扣環 2 個  
追加加工不可

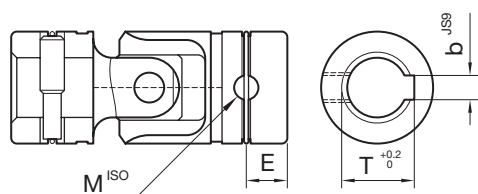


## NC-※※-02A

附屬品：扣環 2 個  
追加加工不可

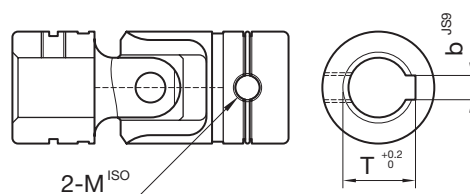


## NC-※※-05A

追加加工可能  
(手動專用無熱處理)



## NC-※※-※※C

防塵套可併同訂購  
訂購時已內附油脂



| 公稱代號      | d  | D  | LC  | l    | C    | E     | P    | l <sub>2</sub> | b | T    | M | KC |
|-----------|----|----|-----|------|------|-------|------|----------------|---|------|---|----|
| NC-06-※※A | 6  | 12 | 31  | 15.5 | 9    | 4.5   | 3    | 10             | - | -    | - | -  |
| NC-08-※※A | 8  | 15 | 36  | 18   | 10   | 5     | 3.5  | 12.5           | - | -    | - | 25 |
| NC-10-※※A | 10 | 19 | 42  | 21   | 12   | 6     | 4.5  | 16.5           | - | -    | - | 32 |
| NC-12-※※A | 12 | 23 | 52  | 26   | 15   | 7.5   | 5    | 20.5           | 4 | 13.5 | 5 | 35 |
| NC-14-※※A | 14 | 26 | 59  | 29.5 | 17   | 8.5   | 5.8  | 23             | 5 | 16   | 6 | 40 |
| NC-16-※※A | 16 | 30 | 74  | 37   | 22   | 11    | 6.5  | 26.5           | 5 | 18   | 6 | 46 |
| NC-18-※※A | 18 | 33 | 81  | 40.5 | 23.5 | 11.75 | 7    | 28.5           | 5 | 20   | 6 | 52 |
| NC-20-※※A | 20 | 36 | 87  | 43.5 | 25   | 12.5  | 8    | 31.5           | 5 | 22   | 6 | 58 |
| NC-25-※※A | 25 | 44 | 105 | 52.5 | 30   | 15    | 10   | 38.5           | 7 | 28   | 8 | 68 |
| NC-30-※※A | 30 | 51 | 122 | 61   | 35   | 17.5  | 11.5 | 44             | 7 | 33   | 8 | 82 |




## ND 型三節式經濟型

## 萬向接頭系列


## ND-※※-00A

附屬品：強力銷 1 支、扣環 2 個  
追加工不可

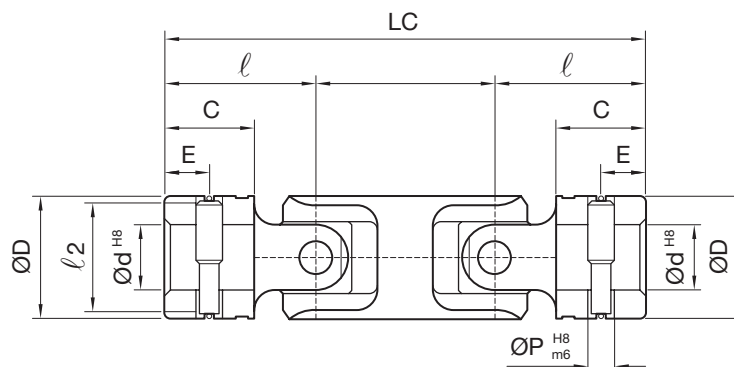


## ND-※※-01A

附屬品：強力銷 1 支、扣環 2 個  
追加工不可

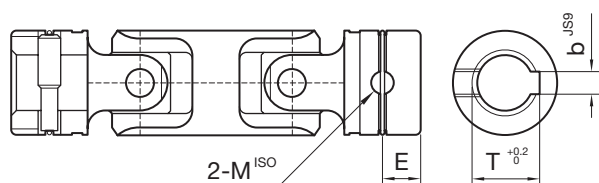


## ND-※※-02A

附屬品：扣環 2 個  
追加工不可

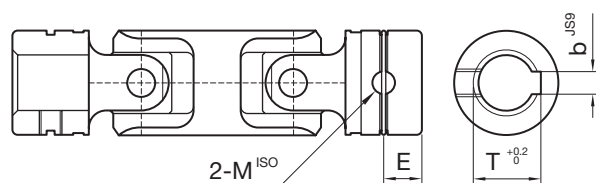


## ND-※※-00A

追加工可能  
(手動專用無熱處理)



## ND-※※-※※C

防塵套可併同訂購  
訂購時已內附油脂



| 公稱代號      | d  | D  | LD    | A    | l    | C    | E     | P    | l <sub>2</sub> | b | T    | M | KC |
|-----------|----|----|-------|------|------|------|-------|------|----------------|---|------|---|----|
| ND-06-※※A | 6  | 12 | 49.5  | 18.5 | 15.5 | 9    | 4.5   | 3    | 10             | - | -    | - | -  |
| ND-08-※※A | 8  | 15 | 58    | 22   | 18   | 10   | 5     | 3.5  | 12.5           | - | -    | - | 25 |
| ND-10-※※A | 10 | 19 | 67.5  | 25.5 | 21   | 12   | 6     | 4.5  | 16.5           | - | -    | - | 32 |
| ND-12-※※A | 12 | 23 | 83    | 31   | 26   | 15   | 7.5   | 5    | 20.5           | 4 | 13.5 | 5 | 35 |
| ND-14-※※A | 14 | 26 | 94.5  | 35.5 | 29.5 | 17   | 8.5   | 5.8  | 23             | 5 | 16   | 6 | 40 |
| ND-16-※※A | 16 | 30 | 117.5 | 43.5 | 37   | 22   | 11    | 6.5  | 26.5           | 5 | 18   | 6 | 46 |
| ND-18-※※A | 18 | 33 | 129   | 48   | 40.5 | 23.5 | 11.75 | 7    | 28.5           | 5 | 20   | 6 | 52 |
| ND-20-※※A | 20 | 36 | 139   | 52   | 43.5 | 25   | 12.5  | 8    | 31.5           | 5 | 22   | 6 | 58 |
| ND-25-※※A | 25 | 44 | 168   | 63   | 52.5 | 30   | 15    | 10   | 38.5           | 7 | 28   | 8 | 68 |
| ND-30-※※A | 30 | 51 | 195   | 73   | 61   | 35   | 17.5  | 11.5 | 44             | 7 | 33   | 8 | 82 |

註：表中未標示的尺寸與 ND-※※-00A 相同。

ND型無貯油設計，可使用防塵套(內填油脂)  
又初期運轉的給油及定期給油須做好，  
給油時在接頭部外圍塗抹油脂，

台北市大同區 10365 承德路三段177巷17號 TEL: (02)2592-2655 FAX: (02)2592-2661




## SC 型 兩節式精密型

## 萬向接頭系列


## SC-※※-00A

附屬品：強力銷 1 支、扣環 2 個  
追加工不可

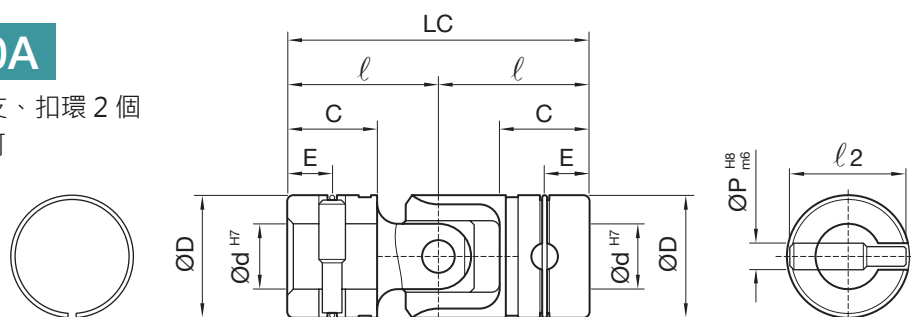


## SC-※※-01A

附屬品：強力銷 1 支、扣環 2 個  
追加工不可

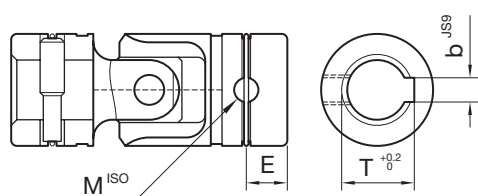


## SC-※※-02A

附屬品：扣環 2 個  
追加工不可

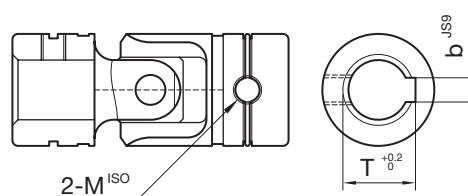

## SC-※※-※※C

防塵套可併同訂購  
訂購時已內附油脂



| 公稱代號      | d  | D  | LC  | ℓ    | C    | E     | P    | ℓ <sub>2</sub> | b  | t    | M  | KC  |
|-----------|----|----|-----|------|------|-------|------|----------------|----|------|----|-----|
| SC-03-00A | 3  | 6  | 26  | 13   | 9    | 2.5   | 1    | 5              | -  | -    | -  | -   |
| SC-04-00A | 4  | 8  | 24  | 12   | 7    | 4     | 1.5  | 6.8            | -  | -    | -  | -   |
| SC-05-00A | 5  | 10 | 30  | 15   | 9    | 5     | 2    | 8.7            | -  | -    | -  | -   |
| SC-06-※※A | 6  | 12 | 31  | 15.5 | 9    | 4.5   | 3    | 10             | -  | -    | 3  | -   |
| SC-08-※※A | 8  | 15 | 36  | 18   | 10   | 5     | 3.5  | 12.5           | -  | -    | 3  | 25  |
| SC-10-※※A | 10 | 19 | 42  | 21   | 12   | 6     | 4.5  | 16.5           | 4  | 11.5 | 5  | 32  |
| SC-12-※※A | 12 | 23 | 52  | 26   | 15   | 7.5   | 5    | 20.5           | 4  | 13.5 | 5  | 35  |
| SC-14-※※A | 14 | 26 | 59  | 29.5 | 17   | 8.5   | 5.8  | 23             | 5  | 16   | 6  | 40  |
| SC-16-※※A | 16 | 30 | 74  | 37   | 22   | 11    | 6.5  | 26.5           | 5  | 18   | 6  | 46  |
| SC-18-※※A | 18 | 33 | 81  | 40.5 | 23.5 | 11.75 | 7    | 28.5           | 5  | 20   | 6  | 52  |
| SC-20-※※A | 20 | 36 | 87  | 43.5 | 25   | 12.5  | 8    | 31.5           | 5  | 22   | 6  | 58  |
| SC-22-※※A | 22 | 40 | 94  | 47   | 27   | 13.5  | 9    | 38.5           | 7  | 25   | 6  | 62  |
| SC-25-※※A | 25 | 44 | 105 | 52.5 | 30   | 15    | 10   | -              | 7  | 28   | 8  | 68  |
| SC-30-※※A | 30 | 51 | 122 | 61   | 35   | 17.5  | 11.5 | 44             | 7  | 33   | 8  | 82  |
| SC-35-※※A | 35 | 59 | 140 | 70   | 40   | 20    | 13   | 52             | 10 | 38.5 | 10 | 90  |
| SC-40-※※A | 40 | 67 | 157 | 78.5 | 45   | 22.5  | 14.5 | 60             | 10 | 43.5 | 10 | 100 |
| SC-45-※※A | 45 | 75 | 176 | 88   | 50   | 25    | 16   | 68             | 12 | 48.5 | 10 | 110 |
| SC-50-※※A | 50 | 83 | 191 | 95.5 | 55   | 27.5  | 17.5 | 76             | 12 | 53.5 | 10 | 120 |




## SD 型 三節式精密型

## 萬向接頭系列


## SD-※※-00A

附屬品：強力銷 1 支、扣環 2 個  
追加工不可

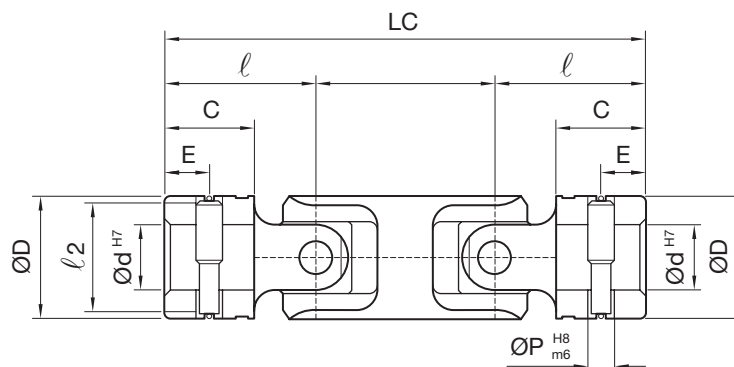


## SD-※※-01A

附屬品：強力銷 1 支、扣環 2 個  
追加工不可

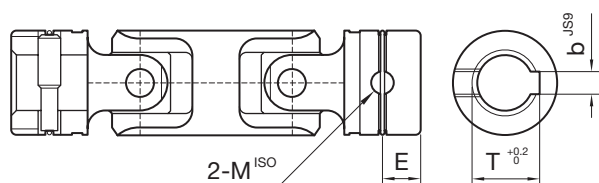


## SD-※※-02A

附屬品：扣環 2 個  
追加工不可

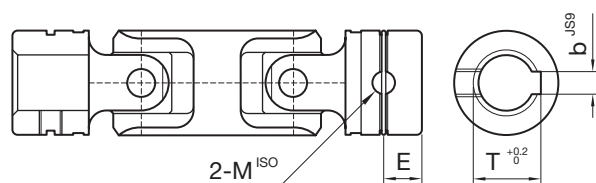

## SD-※※-※※C

防塵套可併同訂購  
訂購時已內附油脂  
Ø35以上規格時改為蛇腹套




| 公稱代號      | d  | D  | LD    | A    | l    | C    | E     | P    | l <sub>2</sub> | b  | T    | M  | KD  |
|-----------|----|----|-------|------|------|------|-------|------|----------------|----|------|----|-----|
| SD-06-※※A | 6  | 12 | 49.5  | 18.5 | 15.5 | 9    | 4.5   | 3    | 10             | -  | -    | -  | -   |
| SD-08-※※A | 8  | 15 | 58    | 22   | 18   | 10   | 5     | 3.5  | 12.5           | 3  | 9.5  | 3  | 26  |
| SD-10-※※A | 10 | 19 | 67.5  | 25.5 | 21   | 12   | 6     | 4.5  | 16.5           | 4  | 11.5 | 5  | 32  |
| SD-12-※※A | 12 | 23 | 83    | 31   | 26   | 15   | 7.5   | 5    | 20.5           | 4  | 13.5 | 5  | 36  |
| SD-14-※※A | 14 | 26 | 94.5  | 35.5 | 29.5 | 17   | 8.5   | 5.8  | 23             | 5  | 16   | 6  | 40  |
| SD-16-※※A | 16 | 30 | 117.5 | 43.5 | 37   | 22   | 11    | 6.5  | 26.5           | 5  | 18   | 6  | 46  |
| SD-18-※※A | 18 | 33 | 129   | 48   | 40.5 | 23.5 | 11.75 | 7    | 28.5           | 5  | 20   | 6  | 52  |
| SD-20-※※A | 20 | 36 | 139   | 52   | 43.5 | 25   | 12.5  | 8    | 31.5           | 5  | 22   | 6  | 58  |
| SD-22-※※A | 22 | 40 | 150   | 56   | 47   | 27   | 13.5  | 9    | 34.5           | 7  | 25   | 6  | 62  |
| SD-25-※※A | 25 | 44 | 168   | 63   | 52.5 | 30   | 15    | 10   | 38.5           | 7  | 28   | 8  | 68  |
| SD-30-※※A | 30 | 51 | 195   | 73   | 61   | 35   | 17.5  | 11.5 | 44             | 7  | 33   | 8  | 82  |
| SD-35-※※A | 35 | 59 | 224   | 84   | 70   | 40   | 20    | 13   | 52             | 10 | 38.5 | 10 | 90  |
| SD-40-※※A | 40 | 67 | 251   | 94   | 78.5 | 45   | 22.5  | 14.5 | 60             | 10 | 43.5 | 10 | 100 |
| SD-45-※※A | 45 | 75 | 282   | 106  | 88   | 50   | 25    | 16   | 68             | 12 | 48.5 | 10 | 110 |
| SD-50-※※A | 50 | 83 | 304   | 113  | 95.5 | 55   | 27.5  | 17.5 | 76             | 12 | 53.5 | 10 | 120 |



## SP 型 附中間栓槽軸 (伸縮式)

## 萬向接頭系列

SP-※※-00A

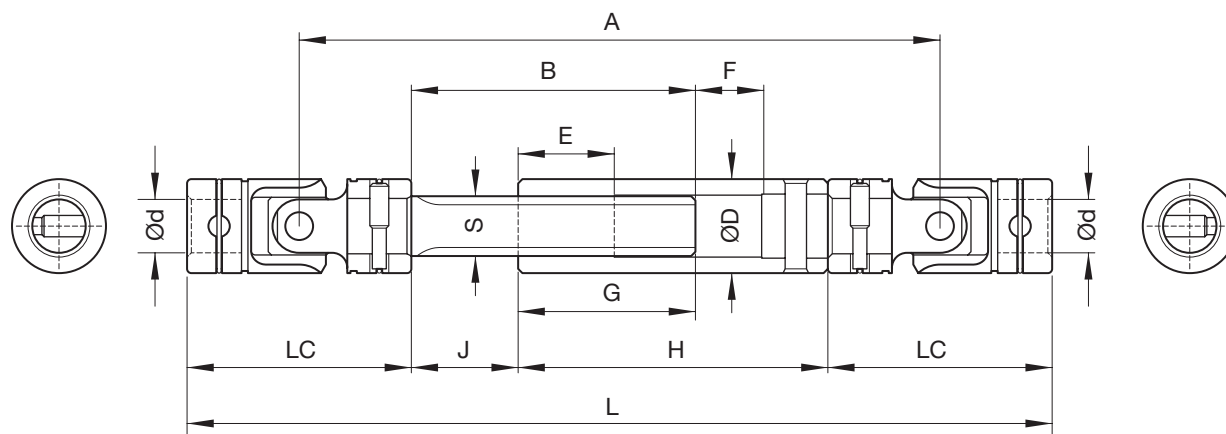

| 公稱代號      | d  | L   | 伸縮節                                                | A   | B   | 栓槽軸齒型 S                   | E  | LC  | LQ  | D  | F  | G   | H   | J  |
|-----------|----|-----|----------------------------------------------------|-----|-----|---------------------------|----|-----|-----|----|----|-----|-----|----|
| SP-08-※※A | 8  | 163 | $\begin{smallmatrix} +19 \\ -11 \end{smallmatrix}$ | 127 | 65  | * 大徑 = 10 m = 0.75 z = 11 | 20 | 36  | -   | 17 | 11 | 39  | 65  | 26 |
| SP-08-09A | 8  | 167 | $\begin{smallmatrix} +17 \\ -13 \end{smallmatrix}$ | 129 | 65  | * 大徑 = 10 m = 0.75 z = 11 | 20 | 36  | 38  | 17 | 13 | 37  | 65  | 28 |
| SP-08-99A | 8  | 169 | $\begin{smallmatrix} +17 \\ -13 \end{smallmatrix}$ | 129 | 65  | * 大徑 = 10 m = 0.75 z = 11 | 20 | -   | 38  | 17 | 13 | 37  | 65  | 28 |
| SP-10-※※A | 10 | 177 | $\begin{smallmatrix} +17 \\ -13 \end{smallmatrix}$ | 135 | 65  | * 大徑 = 12 m = 1.00 z = 10 | 25 | 42  | 42  | 19 | 13 | 37  | 65  | 28 |
| SP-12-※※A | 12 | 225 | $\begin{smallmatrix} +16 \\ -16 \end{smallmatrix}$ | 173 | 88  | 16×13×3.5-6               | 40 | 52  | 52  | 23 | 16 | 56  | 89  | 32 |
| SP-14-※※A | 14 | 240 | $\begin{smallmatrix} +14 \\ -18 \end{smallmatrix}$ | 181 | 87  | 16×13×3.5-6               | 40 | 59  | 59  | 23 | 18 | 54  | 89  | 33 |
| SP-16-※※A | 16 | 308 | $\begin{smallmatrix} +35 \\ -23 \end{smallmatrix}$ | 234 | 115 | 20×16×4-6                 | 40 | 74  | 74  | 30 | 23 | 75  | 120 | 40 |
| SP-18-※※A | 18 | 327 | $\begin{smallmatrix} +30 \\ -26 \end{smallmatrix}$ | 246 | 115 | 20×16×4-6                 | 40 | 81  | 81  | 30 | 28 | 70  | 120 | 45 |
| SP-20-※※A | 20 | 344 | $\begin{smallmatrix} +33 \\ -27 \end{smallmatrix}$ | 257 | 118 | 22×18×5-6                 | 40 | 87  | 87  | 36 | 27 | 73  | 125 | 45 |
| SP-22-※※A | 22 | 360 | $\begin{smallmatrix} +28 \\ -30 \end{smallmatrix}$ | 266 | 115 | 25×21×5-6                 | 40 | 94  | 94  | 40 | 30 | 68  | 125 | 47 |
| SP-25-※※A | 25 | 405 | $\begin{smallmatrix} +38 \\ -32 \end{smallmatrix}$ | 300 | 133 | 28×23×6-6                 | 45 | 105 | 105 | 44 | 32 | 83  | 145 | 50 |
| SP-30-※※A | 30 | 464 | $\begin{smallmatrix} +35 \\ -40 \end{smallmatrix}$ | 342 | 145 | 32×26×6-6                 | 50 | 122 | 122 | 51 | 40 | 85  | 160 | 60 |
| SP-35-※※A | 35 | 515 | $\begin{smallmatrix} +35 \\ -45 \end{smallmatrix}$ | 375 | 150 | 38×32×8-6                 | 50 | 140 | -   | 60 | 45 | 85  | 170 | 65 |
| SP-40-※※A | 40 | 574 | $\begin{smallmatrix} +35 \\ -50 \end{smallmatrix}$ | 417 | 165 | 42×36×8-6                 | 60 | 157 | -   | 67 | 50 | 95  | 190 | 70 |
| SP-45-※※A | 45 | 637 | $\begin{smallmatrix} +35 \\ -55 \end{smallmatrix}$ | 461 | 180 | 45×41×8-8                 | 70 | 176 | -   | 75 | 55 | 105 | 210 | 75 |
| SP-50-※※A | 50 | 697 | $\begin{smallmatrix} +35 \\ -60 \end{smallmatrix}$ | 506 | 200 | 52×46×9-8                 | 80 | 191 | -   | 83 | 60 | 115 | 230 | 85 |

中間軸取栓槽軸，變位時滑動較容易。

利用 F 空間，在固定的裝配間距內，折御容易。標準品以 SC 型接頭裝著。下類情況，請預先洽詢並附略圖訂購。

- (1) 伸縮量大時。
- (2) 高速迴轉等特別要求精度時。
- (3) 使用 SC 型以外的接頭時。
- (4) 多數的栓槽軸間須具互換性時。



### SP 型 附中間栓槽軸 (伸縮式)

### 萬向接頭系列

SP-××-00A




SP-××-03A

(新JIS鍵)



SP-××-33A

(新JIS鍵)




SP-××-08A



SP-××-88A



SP-××-09A



SP-××-99A

